


ILLUM-S/ALONE-EM

Standalone access control



Features:

- Standalone RFID access control (EM/Mifare/HID option), standard is EM reading.
- IP65 rated, outdoor usage
- Support connect external reader
- 2000 users, managed by Master card(standard function) or by remote control

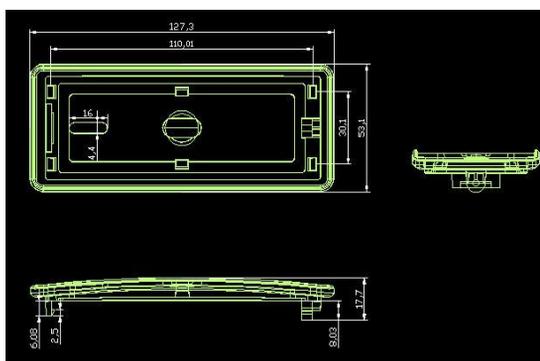

Working DC power	DC power supply: $12 \pm 10\%$; Voltage current $<0.1A$
Storage capacity	2000 user card, 1 card management
Read Range	3-15CM
Reader types	EM card